

FIG. 1

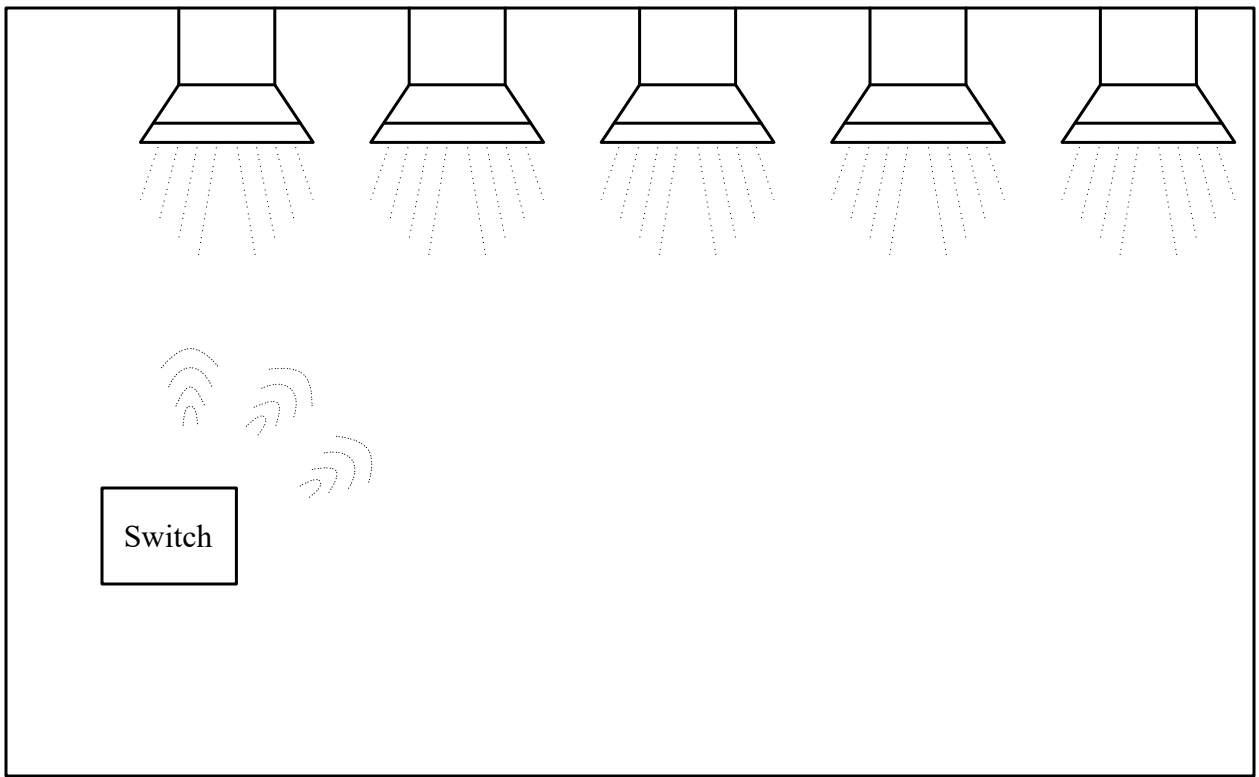


FIG. 2

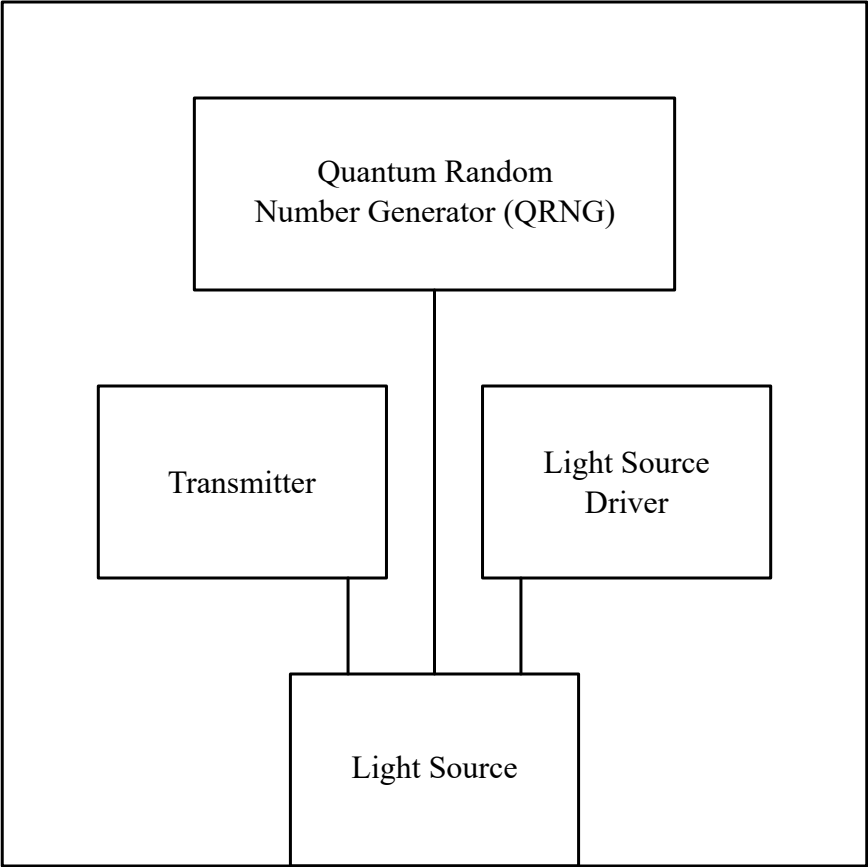


FIG. 3


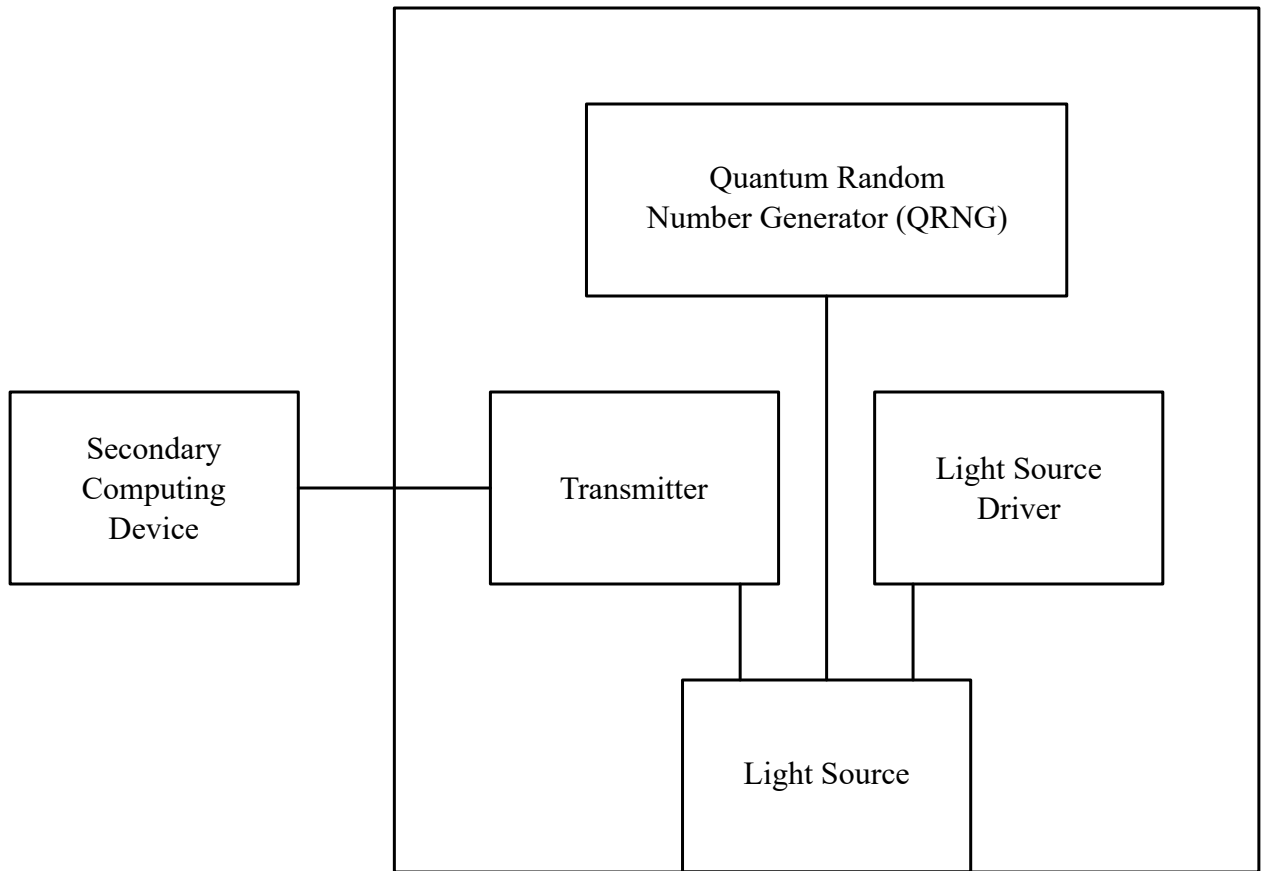


FIG. 4

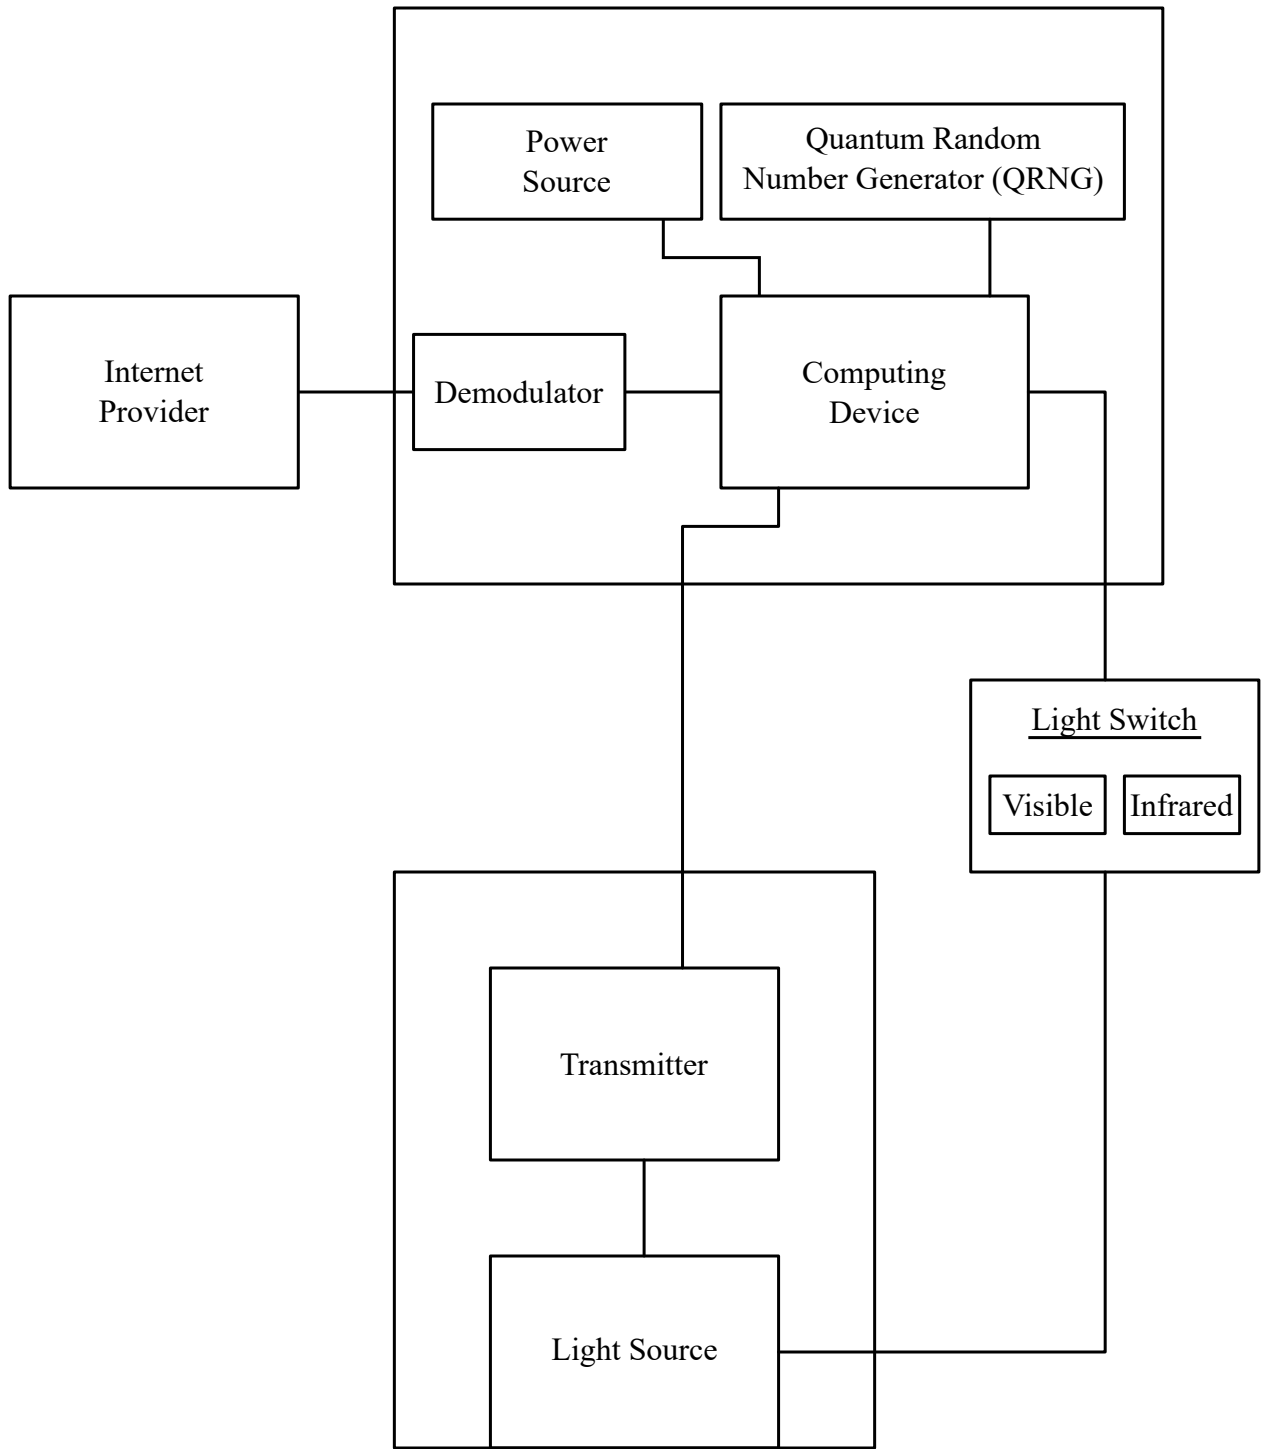

FIG, 5

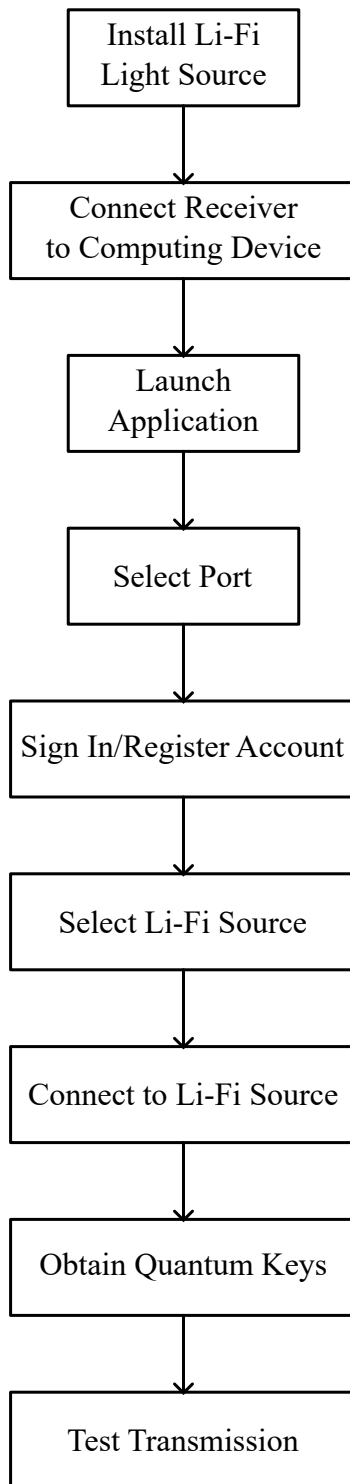


FIG. 6

Bit #	Light Flicker Status	Binary	Data Source
1	Light ON	1	Li-Fi TX
2	Light OFF	0	Li-Fi TX
3	Light ON, Then OFF	"1, 0"	QRNG Chip
4	Light OFF, Then ON	"0, 1"	QRNG Chip

TABLE 1